


Intelsat 31


Frequency Plan

Uplink

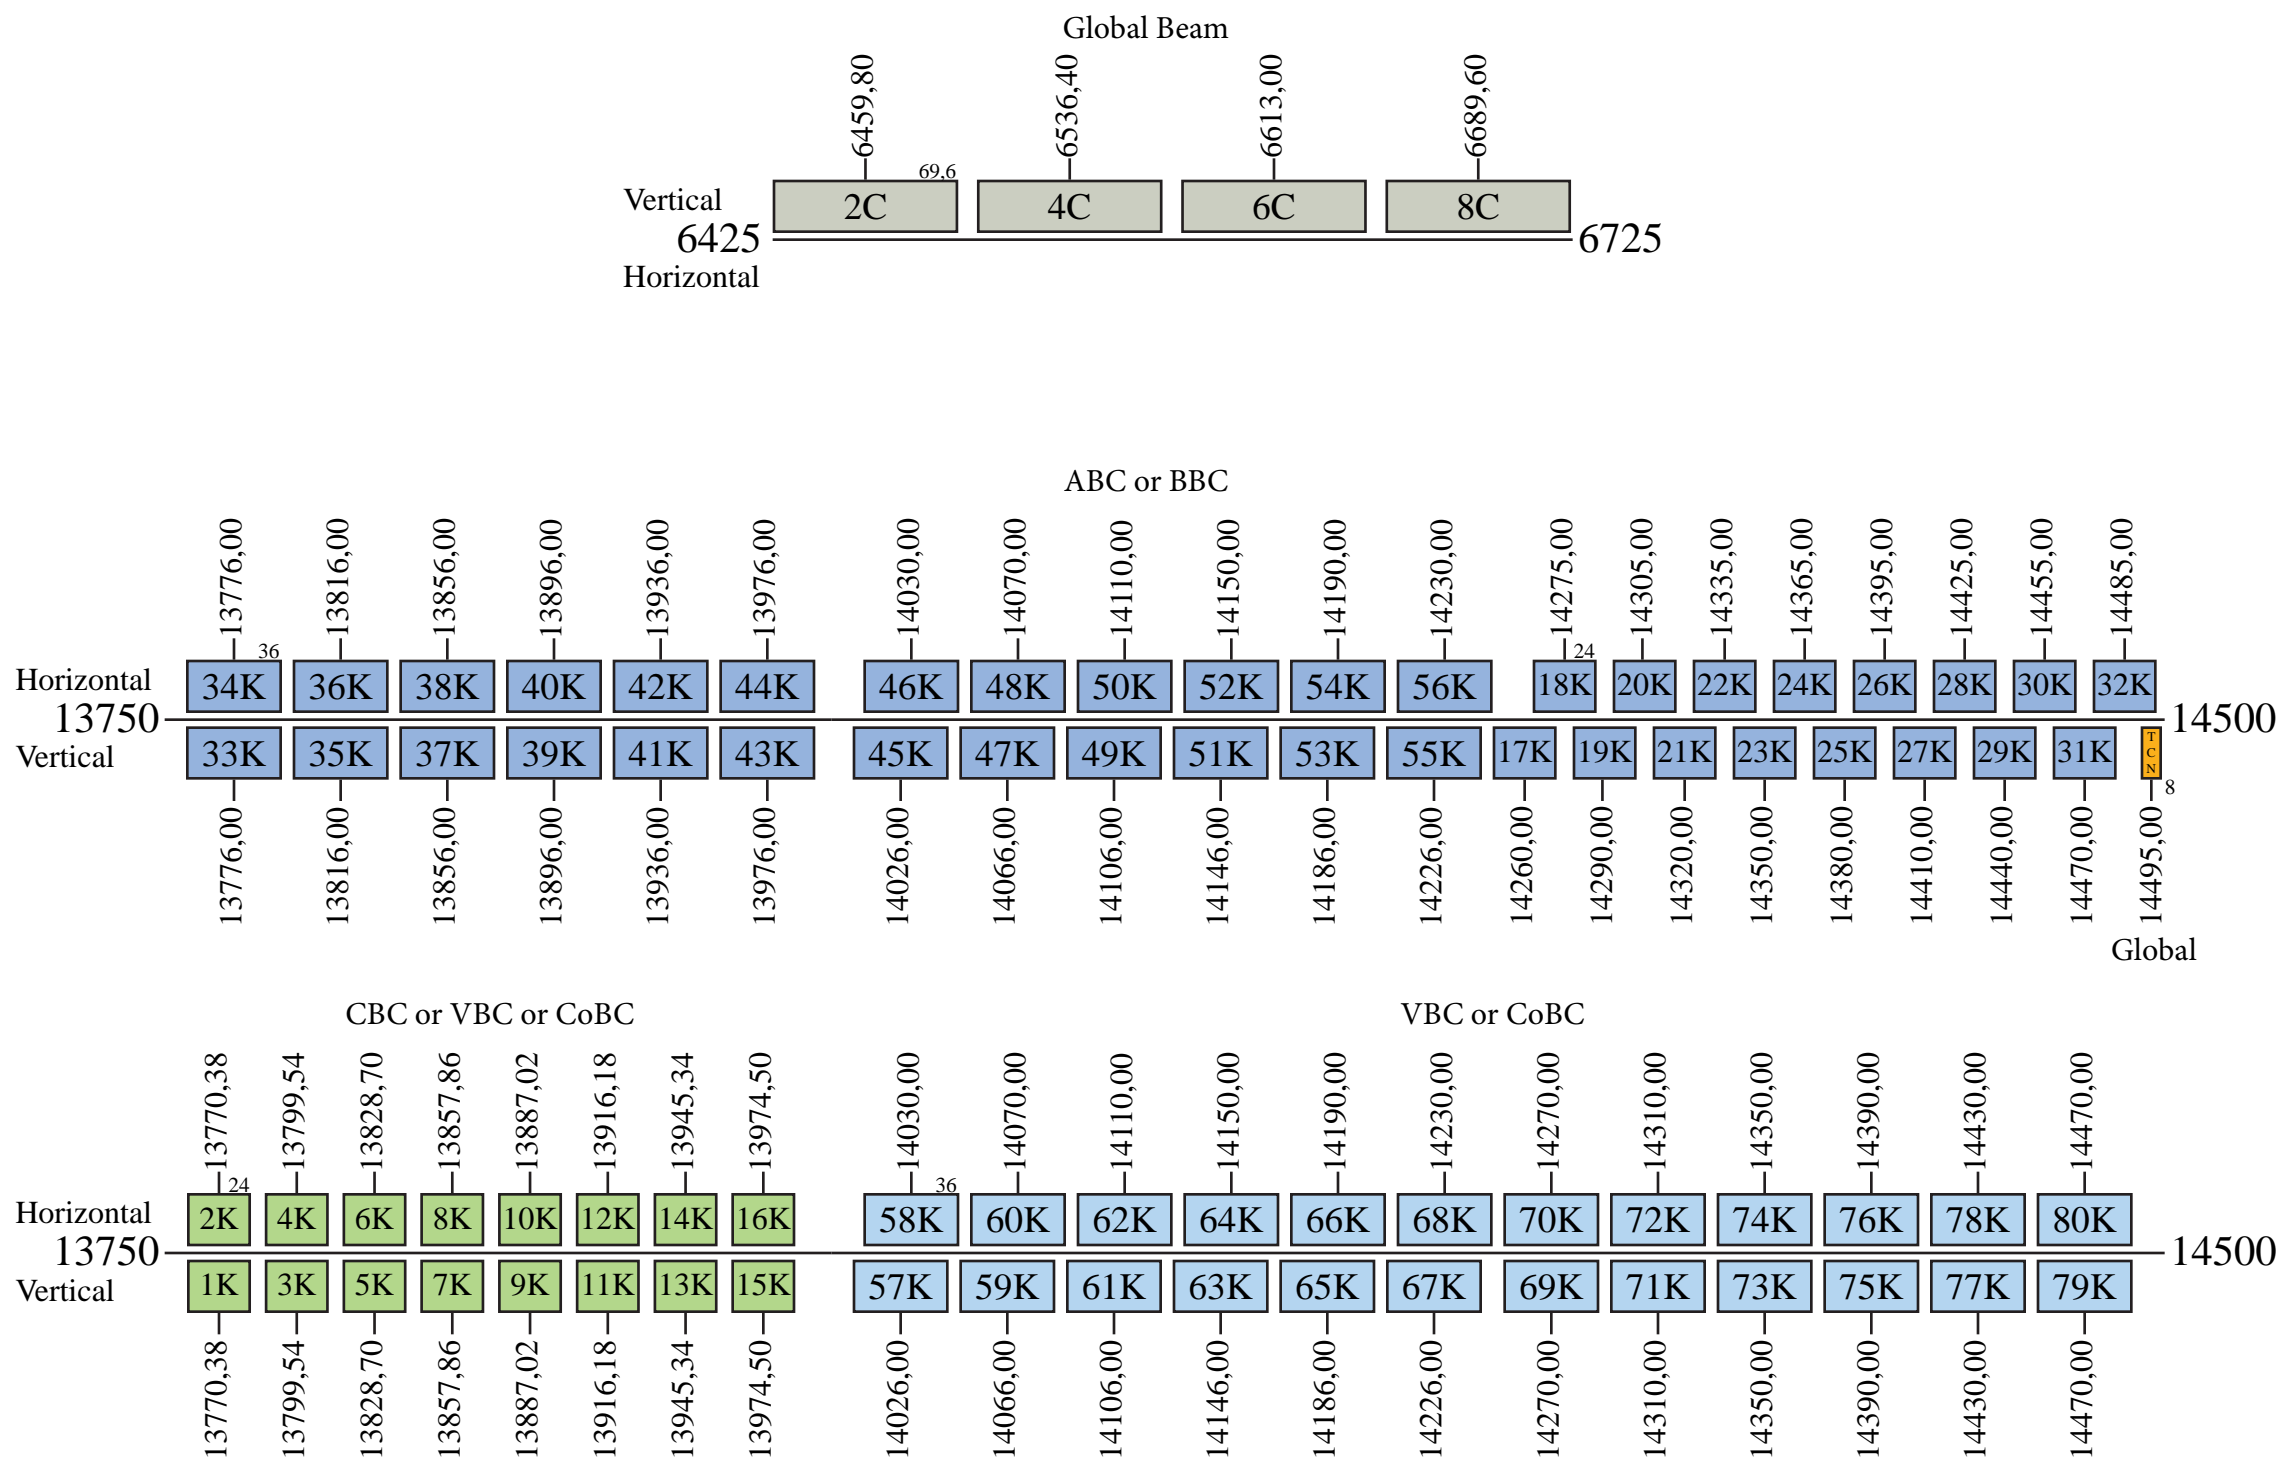

- Command 1: 13998,50 H Global Beam
- Command 2: 14006,00 H Global Beam
- Command 3: 13998,50 L Global Beam
- Command 4: 14006,00 L Global Beam
- Telemetry 1: 11194,25 V Global Beam
- Telemetry 2: 11195,50 V Global Beam
- Telemetry 3: 11196,25 V Global Beam
- Telemetry 4: 11196,75 V Global Beam
- Telemetry 5: 11194,25 R Global Beam
- Telemetry 6: 11195,50 R Global Beam
- Telemetry 7: 11196,25 R Global Beam
- Telemetry 8: 11196,75 R Global Beam
- Beacon 1: 11705,50 L Global Beam
- Beacon 2: 11193,00 R Global Beam

Downlink

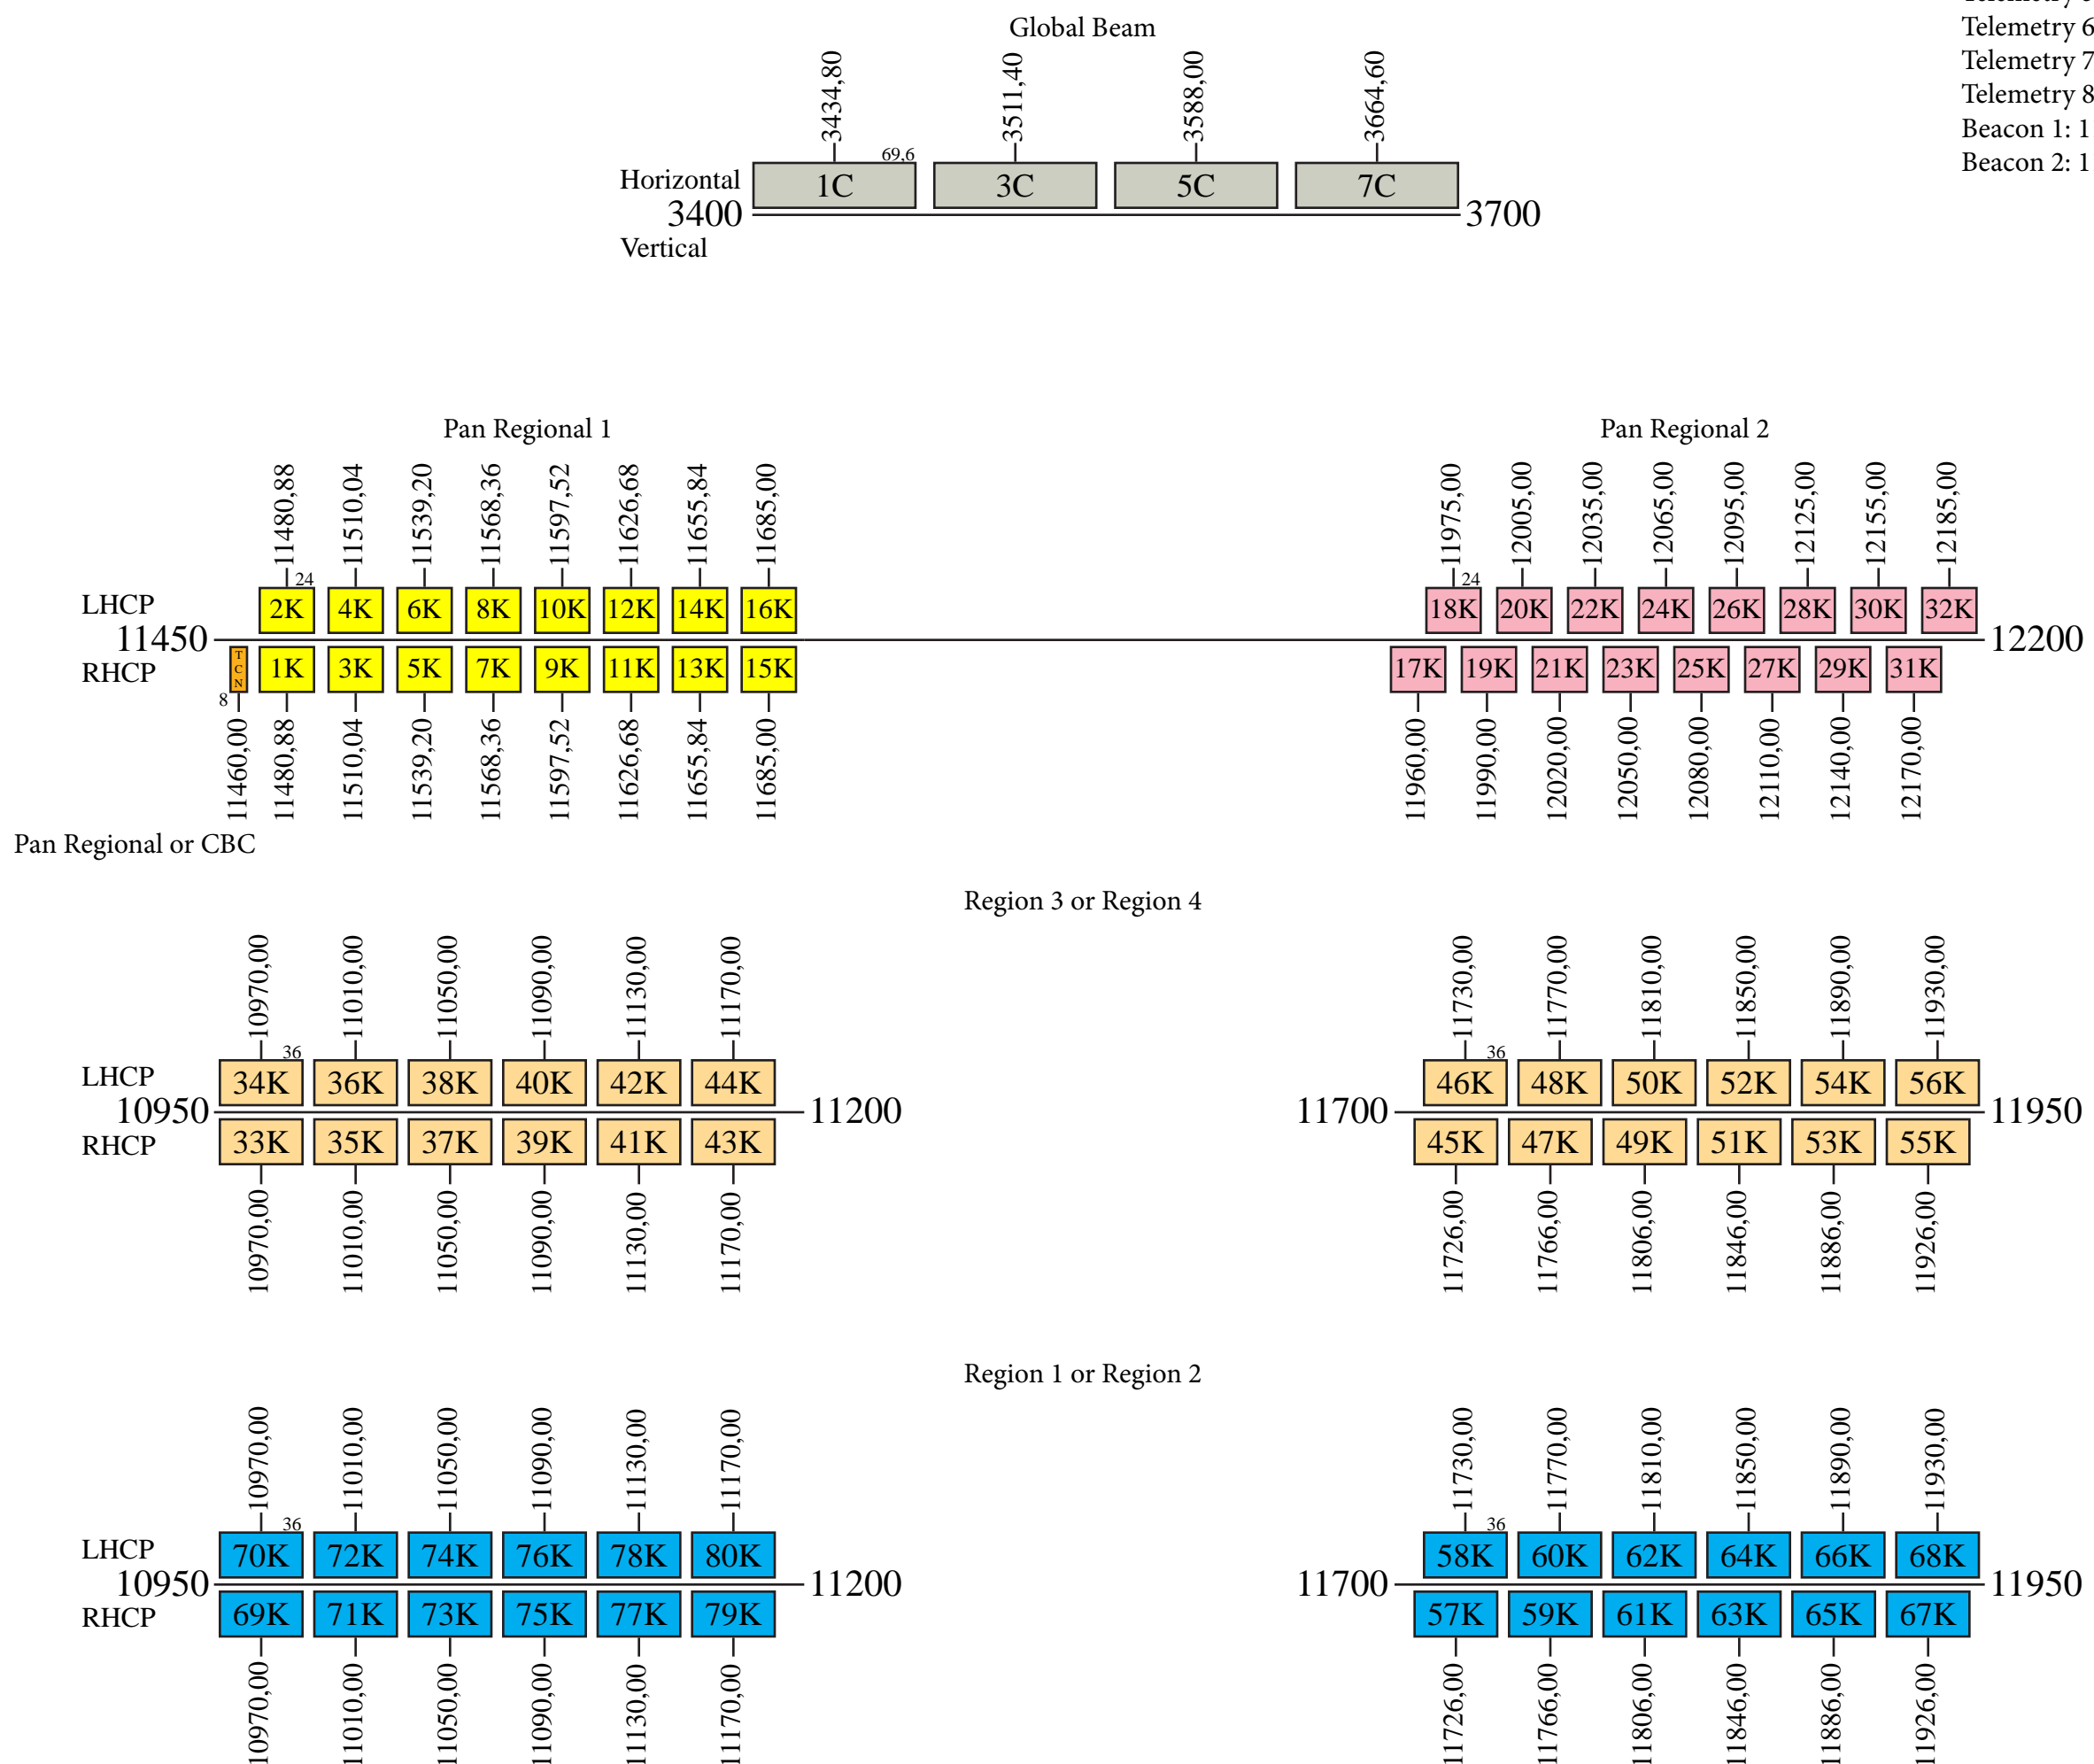

1K,3K,5K,7K,9K,11K,13K,15K (Pan Regional),33K,37K,41K,45K,49K,53K (Regional 3),33K,37K,41K,45K,49K,53K (Regional 4),59K,63K,67K,72K,76K,80K (Regional 1),59K,63K,67K,72K,76K,80K (Regional 2), Channels may be operated in high power mode.