
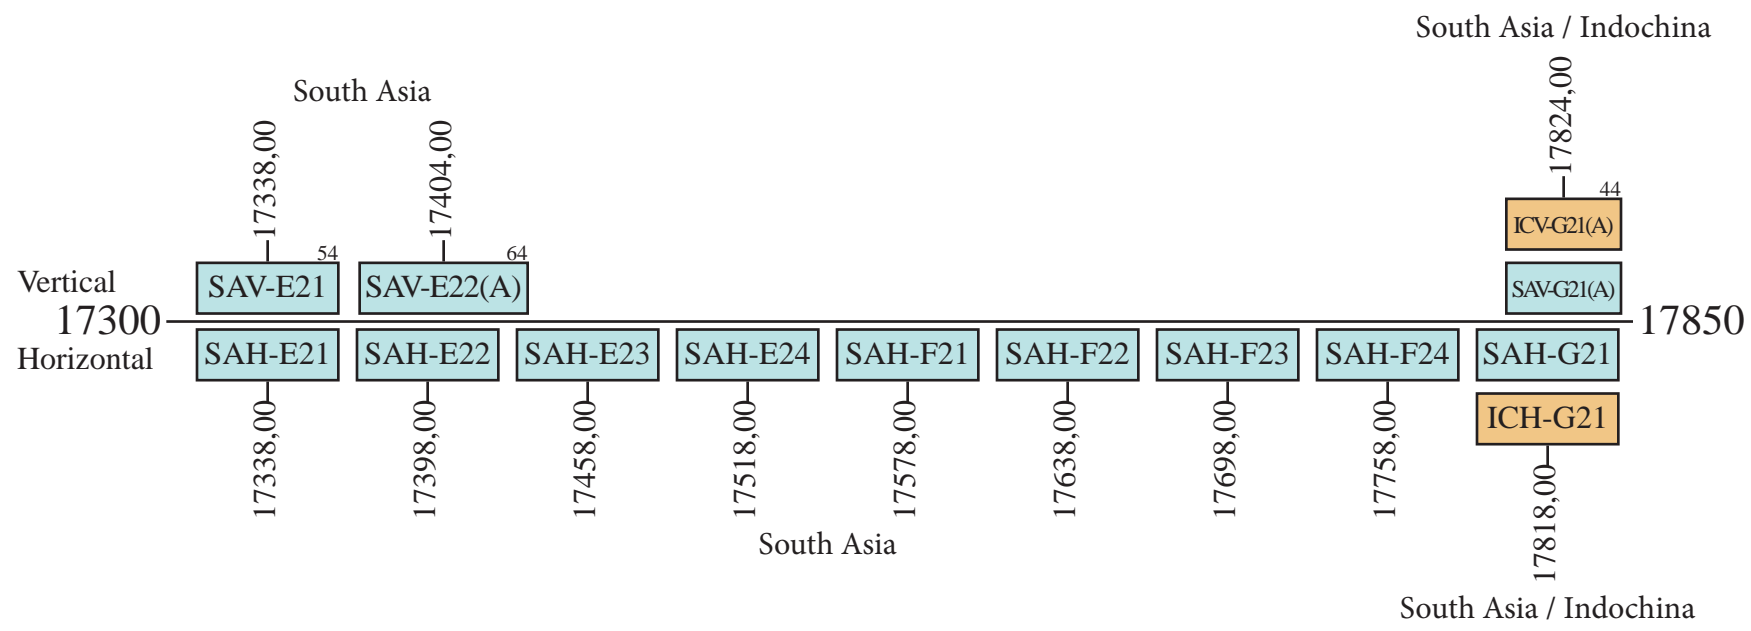
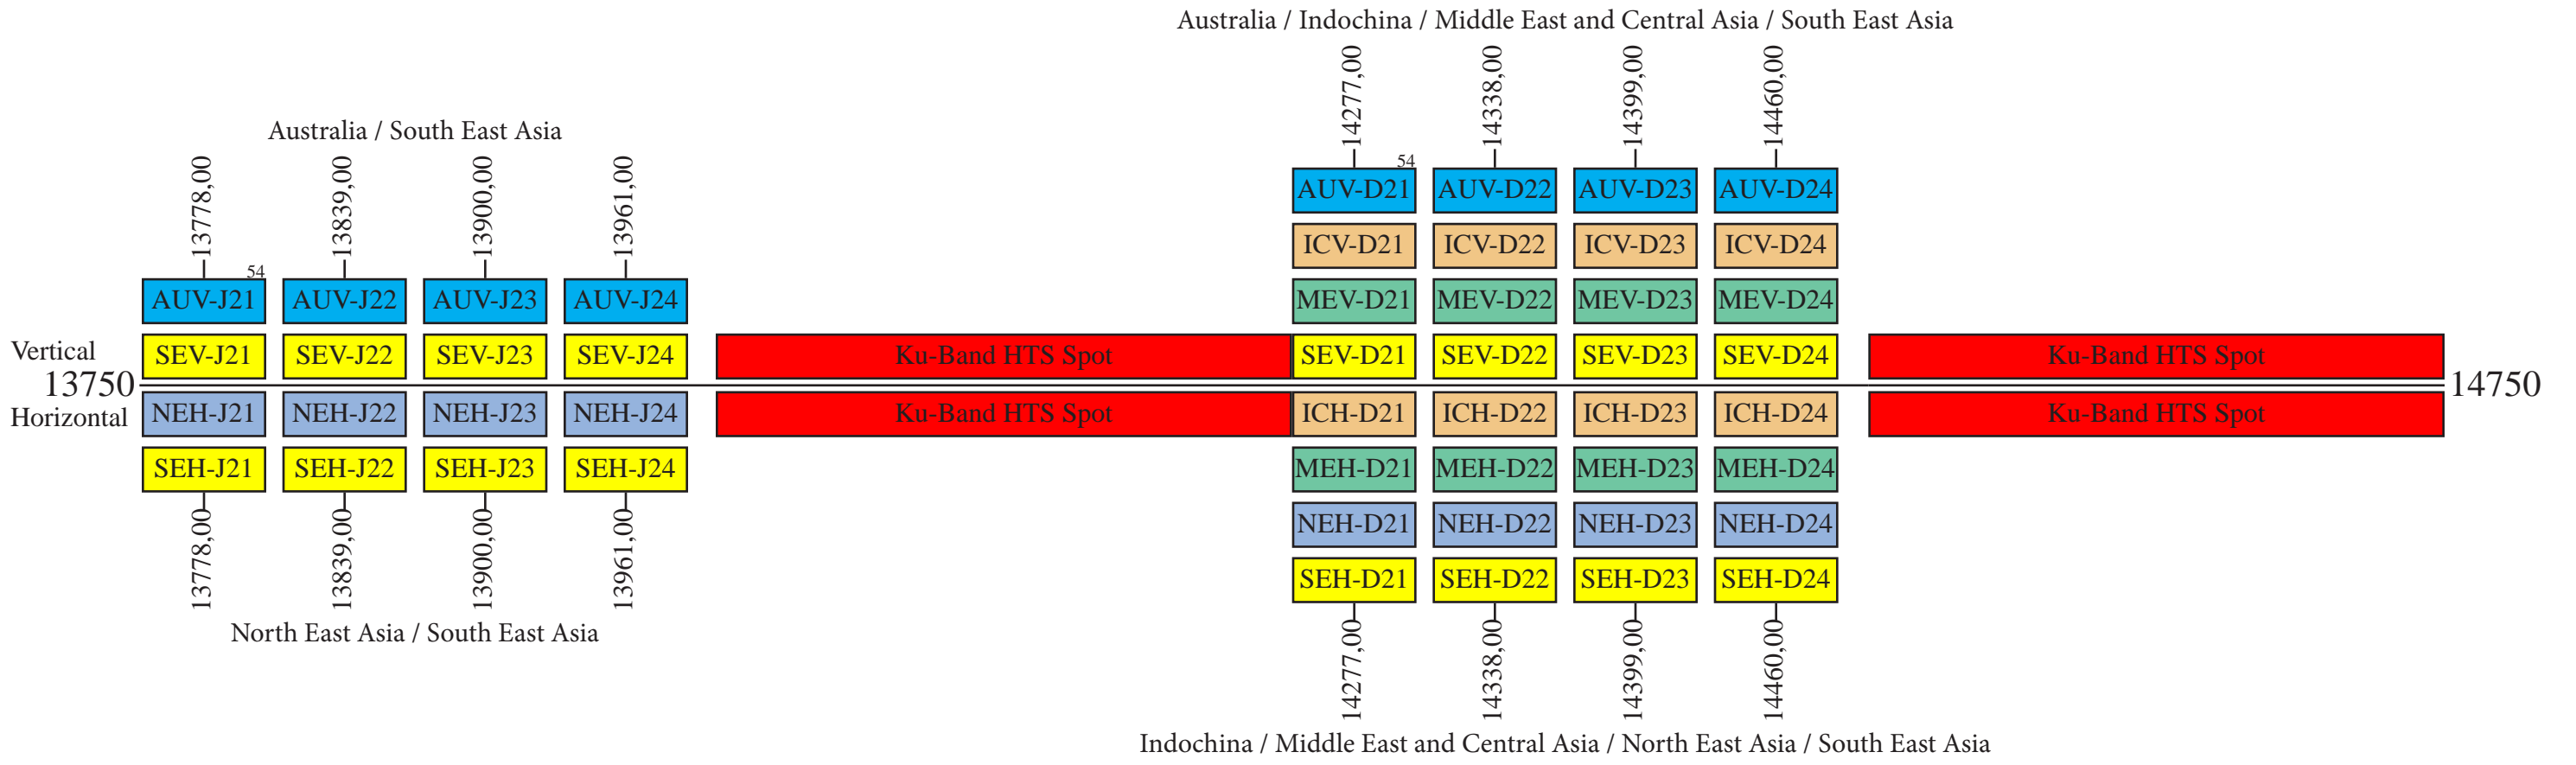


SES-12

Provisional Frequency Plan

Uplink


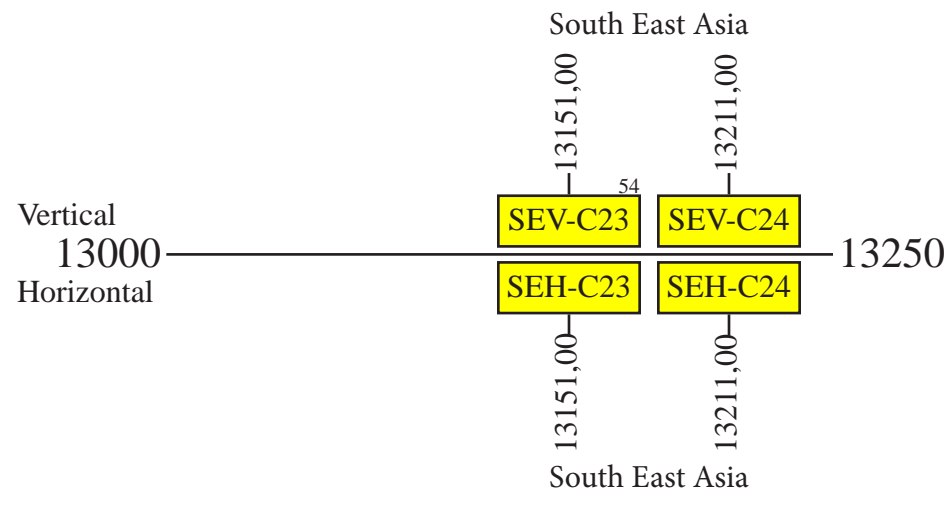


- Command 1a: 13996,50 R or L Omni
- Command 1b: 13996,50 (On-Station)
- Command 2a: 13998,00 R or L Omni
- Command 2b: 13998,00 (On-Station)
- Command 3a: 13999,50 R or L Omni
- Command 3b: 13999,50 (On-Station)
- Command 4a: 14494,50 R or L Omni
- Command 4b: 14494,50 (On-Station)
- Command 5a: 14496,00 R or L Omni
- Command 5b: 14496,00 (On-Station)
- Command 6a: 14497,50 R or L Omni
- Command 6b: 14497,50 (On-Station)
- Command 7a: 14498,00 R or L Omni
- Command 7b: 14498,00 (On-Station)
- Telemetry 1a: 11449,50 R or L Omni
- Telemetry 1b: 11449,50 V Global
- Telemetry 2a: 11703,50 R or L Omni
- Telemetry 2b: 11703,50 H Global
- Beacon 1: 18199,00 L Global

SES-12

Provisional Frequency Plan

Downlink

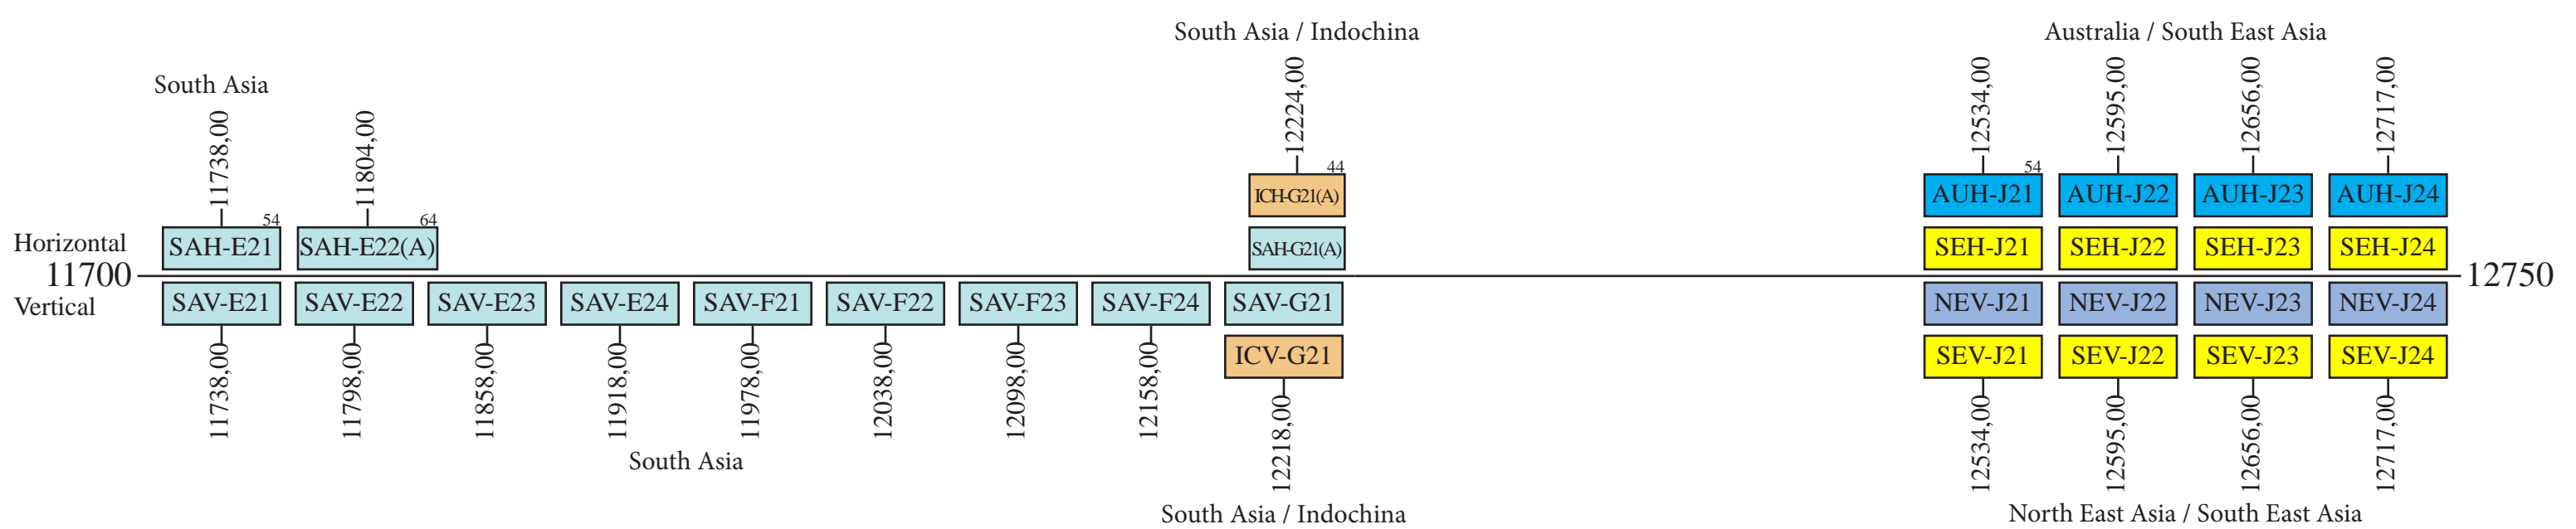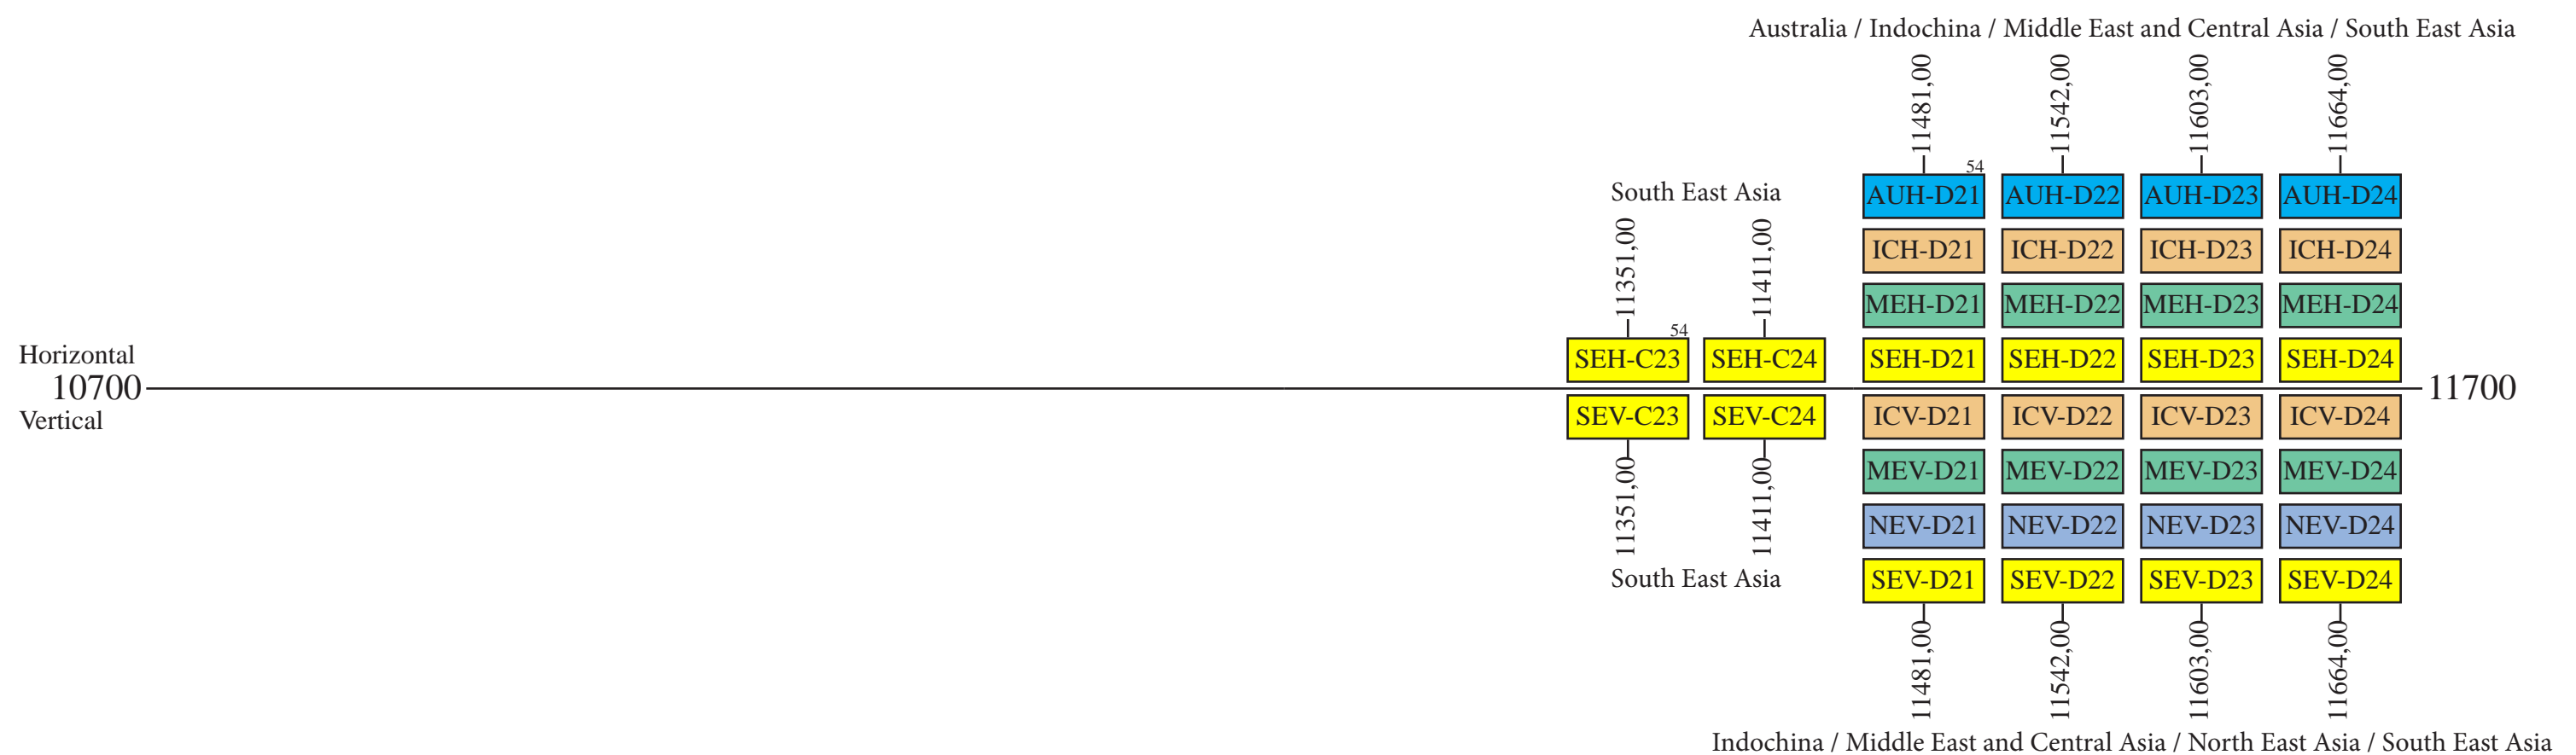

Up to 36 transponders can be activated simultaneously:

- 1 to 2 = SEH-C23 or MEH-D21, SEH-C24 or MEH-D22.
- 3 to 4 = MEH-D23, MEH-D24.
- 5 to 6(A) = SAH-E21, SAH-E22(A).
- 7(A) = SAH-G21(A) or ICH-G21(A).
- 8 to 11 = MEV-D21 or SAV-E21, MEV-D22 or SAV-E22, MEV-D23 or SAV-E23, MEV-D24 or SAV-E24.
- 12 to 15 = AUH-D21 or SAV-F21, AUH-D22 or SAV-F22, AUH-D23 or SAV-F23, AUH-D24 or SAV-F24.
- 16 = SAV-G21 or ICV-G21.
- 17 to 18 = SEV-C23 or ICV-D21 or MEV-D21, SEV-C24 or ICV-D22 or MEV-D22.
- 19 to 20 = ICV-D23 or MEV-D23, ICV-D24 or MEV-D24.
- 21 to 24 = AUH-D21 or ICH-D21 or SEH-D21, AUH-D22 or ICH-D22 or SEH-D22, AUH-D23 or ICH-D23 or SEH-D23, AUH-D24 or ICH-D24 or SEH-D24.
- 25 to 28 = NEV-D21 or SEV-D21, NEV-D22 or SEV-D22, NEV-D23 or SEV-D23, NEV-D24 or SEV-D24.
- 29 to 32 = AUH-J21 or SEH-J21, AUH-J22 or SEH-J22, AUH-J23 or SEH-J23, AUH-J24 or SEH-J24.
- 33 to 36 = NEV-J21 or SEV-J21, NEV-J22 or SEV-J22, NEV-J23 or SEV-J23, NEV-J24 or SEV-J24.

Interconnections			
Transponder Uplink	Beam Uplink	Transponder Downlink	Beam Downlink
AUV-D21 to AUV-D24 ICV-D21 to ICV-D24 MEV-D21 to MEV-D24 NEH-D21 to NEH-D24 SAH-F21 to SAH-F24 SEV-D21 to SEV-D24	Australia Indochina Middle East and Central Asia North East Asia South Asia South East Asia	AUH-D21 to AUH-D24	Australia
AUV-J21 to AUV-J24 SEV-J21 to SEV-J24	Australia South East Asia	AUH-J21 to AUH-J24	Australia
AUV-D21 to AUV-D24 ICV-D21 to ICV-D24 MEV-D21 to MEV-D24 NEH-D21 to NEH-D24 SEV-D21 to SEV-D24	Australia Indochina Middle East and Central Asia North East Asia South East Asia	ICH-D21 to ICH-D24	Indochina
AUV-D21 to AUV-D22 ICH-D21 to ICH-D22 MEH-D21 to MEH-D22 NEH-D21 to NEH-D22 SEH-C23 to SEH-C24 SEH-D21 to SEH-D22	Australia Indochina Middle East and Central Asia North East Asia South East Asia South East Asia	ICV-D21 to ICV-D22	Indochina
AUV-D23 to AUV-D24 ICH-D23 to ICH-D24 MEH-D23 to MEH-D24 NEH-D23 to NEH-D24 SEH-D23 to SEH-D24	Australia Indochina Middle East and Central Asia North East Asia South East Asia	ICV-D23 to ICV-D24	Indochina
ICV-G21(A) SAV-G21(A)	Indochina South Asia	ICH-G21(A)	Indochina
ICH-G21 SAH-G21	Indochina South Asia	ICV-G21	Indochina
AUV-D21 to AUV-D22 MEV-D21 to MEV-D22 SEV-C23 to SEV-C24	Australia Middle East and Central Asia South East Asia	MEH-D21 to MEH-D22	Middle East and Central Asia
AUV-D23 to AUV-D24 MEV-D23 to MEV-D24	Australia Middle East and Central Asia	MEH-D23 to MEH-D24	Middle East and Central Asia
AUV-D21 to AUV-D22 ICH-D21 to ICH-D22 MEH-D21 to MEH-D22 NEH-D21 to NEH-D22 SAH-E21 to SAH-E22 SEH-C23 to SEH-C24 SEH-D21 to SEH-D22	Australia Indochina Middle East and Central Asia North East Asia South Asia South East Asia South East Asia	MEV-D21 to MEV-D22	Middle East and Central Asia
AUV-D23 to AUV-D24 ICH-D23 to ICH-D24 MEH-D23 to MEH-D24 NEH-D23 to NEH-D24 SAH-E23 to SAH-E24 SEH-D23 to SEH-D24	Australia Indochina Middle East and Central Asia North East Asia South Asia South East Asia	MEV-D23 to MEV-D24	Middle East and Central Asia
AUV-D21 to AUV-D24 ICH-D21 to ICH-D24 MEH-D21 to MEH-D24 NEH-D21 to NEH-D24 SEH-D21 to SEH-D24	Australia Indochina Middle East and Central Asia North East Asia South East Asia	NEV-D21 to NEV-D24	North East Asia
NEH-J21 to NEH-J24 SEH-J21 to SEH-J24	North East Asia South East Asia	NEV-J21 to NEV-J24	North East Asia
SAV-E21 to SAV-E22(A) ICV-G21(A) SAV-G21(A)	South Asia Indochina South Asia	SAH-E21 to SAH-E22(A) SAH-G21(A)	South Asia South Asia
MEH-D21 to MEH-D24 NEH-D21 to NEH-D24 SAH-E21 to SAH-E24	Middle East and Central Asia North East Asia South Asia	SAV-E21 to SAV-E24	South Asia
AUV-D21 to AUV-D24 ICV-D21 to ICV-D24 MEV-D21 to MEV-D24 NEH-D21 to NEH-D24 SAH-F21 to SAH-F24 SEV-D21 to SEV-D24	South Asia Australia Middle East and Central Asia North East Asia South Asia South East Asia	SAV-F21 to SAV-F24	South Asia
ICH-G21 SAH-G21	Indochina South Asia	SAV-G21	South Asia
AUV-D21 to AUV-D22 MEV-D1 to MEV-D22 SEV-C23 to SEV-C24	Australia Middle East and Central Asia South East Asia	SEH-C23 to SEH-C24	South East Asia
AUV-D21 to AUV-D22 ICH-D21 to ICH-D22 MEH-D21 to MEH-D22 NEH-D21 to NEH-D22 SEH-C3 to SEH-C24 SEH-D21 to SEH-D22	Australia Indochina Middle East and Central Asia North East Asia South East Asia South East Asia	SEV-C23 to SEV-C24	South East Asia
AUV-D21 to AUV-D24 ICV-D21 to ICV-D24 MEV-D21 to MEV-D24 NEH-D21 to NEH-D24 SEV-D21 to SEV-D24	Australia Indochina Middle East and Central Asia North East Asia South East Asia	SEH-D21 to SEH-D24	South East Asia
AUV-D21 to AUV-D24 ICH-D21 to ICH-D24 MEH-D21 to MEH-D24 NEH-D21 to NEH-D24 SEH-D21 to SEH-D24	Australia Indochina Middle East and Central Asia North East Asia South East Asia	SEV-D21 to SEV-D24	South East Asia
AUV-J21 to AUV-J24 SEV-J21 to SEV-J24	Australia South East Asia	SEH-J21 to SEH-J24	South East Asia
NEH-J21 to NEH-J24 SEH-J21 to SEH-J24	North East Asia South East Asia	SEV-J21 to SEV-J24	South East Asia